


ANSI / ASME B18.3

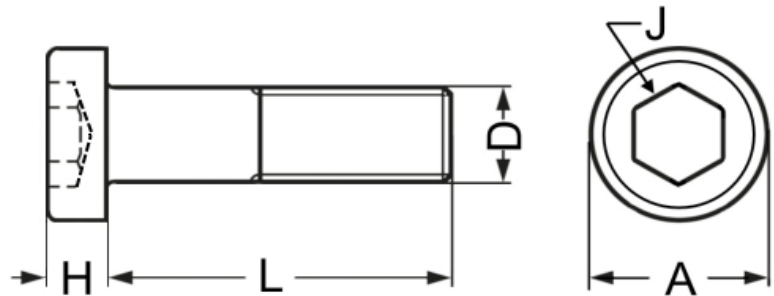

Technical Specification of Low Head Cap Screws

Gewinde- durchmesser	Kopfdurchmesser (A)		Kopfhöhe (H)		Schlüsselweite (J)	
	Inch	mm	Inch	mm	Inch	mm
8	0.270 - 0.265	6,86 - 6,73	0.085 - 0.079	2,16 - 2,01	5/64	1,984
10	0.312 - 0.307	7,92 - 7,80	0.098 - 0.092	2,49 - 2,34	3/32	2,381
1/4	0.375 - 0.369	9,53 - 9,37	0.127 - 0.121	3,23 - 3,07	1/8	3,175
5/16	0.437 - 0.431	11,10 - 10,95	0.158 - 0.152	4,01 - 3,86	5/32	3,969
3/8	0.562 - 0.556	14,27 - 14,12	0.192 - 0.182	4,88 - 4,62	3/16	4,762
1/2	0.750 - 0.743	19,05 - 18,87	0.254 - 0.244	6,45 - 6,20	1/4	6,350

Maße können durch Toleranzen bei der Fertigung von Massenteile abweichen

